

DH-HAC-HFW1231TM-I8-A

2MP Starlight HDCVI IR Bullet Camera



- Max 30 fps@1080p
- Starlight, 130 dB true WDR, 3D NR
- 3.6 mm fixed lens (2.8 mm, 6 mm, 8 mm optional)
- CVI/CVBS/AHD/TVI switchable
- Super Adapt
- Built-in mic
- Max. IR length 80 m, Smart IR
- IP67, DC 12 V



System Overview

Lite Series is suitable for users who requires high quality monitoring products at a reasonable price. It is cost effective and offers high performance, which makes it an ideal choice for residential and small-medium business applications. This series offers an option of a wide range of technologies such as Full-color and Starlight, providing various solutions for different scenarios.

Functions

Starlight

With the adoption of large sized high performance sensor and large aperture lens, the camera is able to provide incomparable performance even under extreme lowlight environment. The starlight feature allows more details to be captured and accurate color to be recognized at night or in scenes with limited illumination.

Broadcast-quality Audio

Audio information is used as supplementary evidence in video surveillance applications. The HDCVI camera supports audio signal transmission over coaxial cable. In addition, it adopts unique audio processing and transmission technology that best restores source audio and eliminates noise, guaranteeing the quality and effectiveness of collected audio information.

Wide Dynamic Range

With advanced Wide Dynamic Range (WDR) technology, Dahua HDCVI camera provides clear details in the environment of strong brightness contrast. The bright and dark area can get clear video even in high brightness environment or with backlight shadow.

Super Adapt

Embedded with intelligent algorithm, for changing external environment, camera can automatically adjust parameters to present the optimal image, and it solves the trouble of configuration.

Advanced 3DNR

3DNR is noise reduction technology that detects and eliminates random noises by comparing two sequential frames. Dahua's advanced 3DNR technology allows remarkable noise reduction with little impact to sharpness, especially under limited lighting condition. Besides, the advanced 3DNR effectively decreases the band width and saves the storage space.

Smart Illumination

The camera is designed with IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.



Protection (IP67, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification						Resolution		1080p (1920 × 1080); 960H (960 × 576/960 × 480)	
Camera						Day/Night		Auto switch by ICR	
Image Sensor		1/2.8" CMOS				BLC		BLC/WDR/HLC	
Max. Resolution		1920 (H) × 1080 (V)				WDR		130 dB	
Pixel		2MP				White Balance		Auto; Area WB	
Scanning System		Progressive				Gain Control		Auto; manual	
Electronic Shutter Speed		PAL: 1/25 s–1/100,000 s NTSC: 1/30 s–1/100,000 s				Noise Reduction		3D NR	
S/N Ratio		> 65 dB				Smart IR		Yes	
Min. Illumination		0.002 Lux/F1.6, 30 IRE, 0 Lux IR on				Mirror		Off/On	
Illumination Distance		80 m (262.5 ft)				Privacy Masking		Off/On (8 area, rectangle)	
Illuminator On/Off Control		Auto; manual				Certifications			
Illuminator Number		2 (IR light)				Certifications			
Pan/Tilt/Rotation Range		Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°				Certifications			
						Port			
						Video Output			
						Video output choices of CVI/TVI/AHD/CVBS by one BNC port			
						Audio Input			
						One channel built-in mic			
						Power			
						Power Supply			
						12 V ±30% DC			
						Power Consumption			
						Max 5.1 W (12 V DC, IR on)			
						Environment			
						Operating Temperature			
						–40 °C to +60 °C (–40 °F to 140 °F); < 95% (non-condensation)			
						Storage Temperature			
						–40 °C to +60 °C (–40 °F to 140 °F); < 95% (non-condensation)			
						Structure			
						Casing			
						Metal throughout the whole casing			
						Camera Dimensions			
						240.7 mm × 90.7 mm × 90.4 mm (9.48" × 3.57" × 3.56")			
						Net Weight			
						0.65 Kg (1.43 lb)			
						Gross Weight			
						0.87 Kg (1.92 lb)			
Video									
Frame Rate		CVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; AHD: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; TVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; CVBS: PAL: 960 × 576H; NTSC: 960 × 480H							

Ordering Information		
Type	Model	Description
2M Camera	DH-HAC-HFW1231TMP-I8-A	2MP Starlight HDCVI IR Bullet Camera, PAL
	DH-HAC-HFW1231TMN-I8-A	2MP Starlight HDCVI IR Bullet Camera, NTSC
Accessories (Optional)	PFA13G	Junction box
	PFA130-E	IP66 Junction box
	PFA152-E	Pole Mount Bracket (For use with PFA130-E junction box)
	PFM800-E	Passive HDCVI Balun
	PFM321	12 V 1A Power Adapter
	PFM904	Integrated Mount Tester

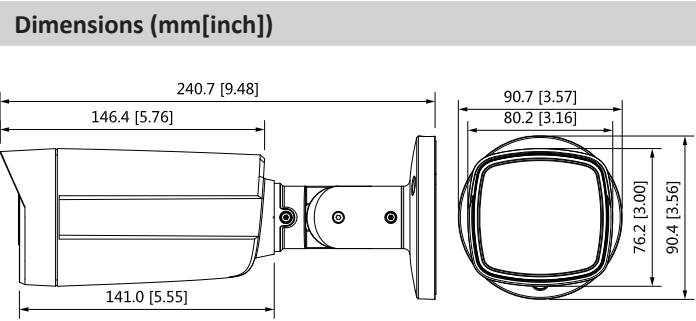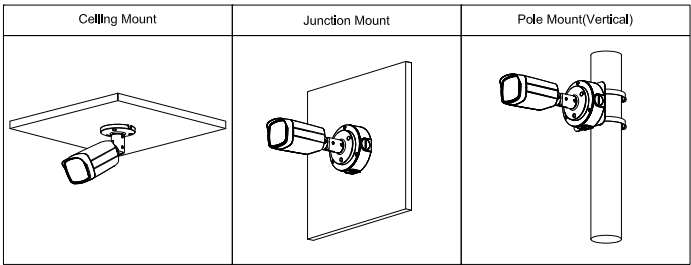

Accessories

Optional:



PFA13G
Junction box



PFA130-E
IP66 Junction box



PFA152-E
Pole Mount Bracket
(For use with PFA130-E
junction box)



PFM800-E
Passive HDCVI Balun



PFM321
12V 1A Power Adapter



PFM904
Integrated Mount Tester